

Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 12VAC/DC GN/YE/R



Dart No.	600 110 74
Part No.:	699.110.74
Series:	Kompakt 37

MECHANICAL DATA	
Height	175 mm
Diameter	38 mm
Materials	PC
Dome colour	Green Red Yellow
Housing colour	Black
Protection category	IP65
Connection	Cable
cross-sectional area maximum	0,34mm² / 22AWG
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9 mm
Cable length	2000 mm
Tension relief	Pull-out protection
Type of fixing	Built-in mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	200 g
Product weight	166 g

ELECTRICAL DATA		
Operating voltage	12V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	12 VDC	
Rated operational current	295 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA			
Light source	LED		
Light colour	Green Red Yellow		
Optical signal image	Permanent		
Service life optical	50,000 h maximum		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 12VAC/DC GN/YE/R

ACOUSTIC DATA				
Volume (max) at 1m distance	80,0 dB (A)			
Acoustic signal image	Pulse tone			
Audio frequency	2900 Hz			
Acoustic service life	5,000 h minimum			


APPROVAL DATA			
Conforms with CE	Yes		
Conforms with RoHS directive	Yes		
WEEE	Yes		
Conforms with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	cULus		
UL Type Rating	Type 12 Type 4X		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with DNV	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 12VAC/DC GN/YE/R

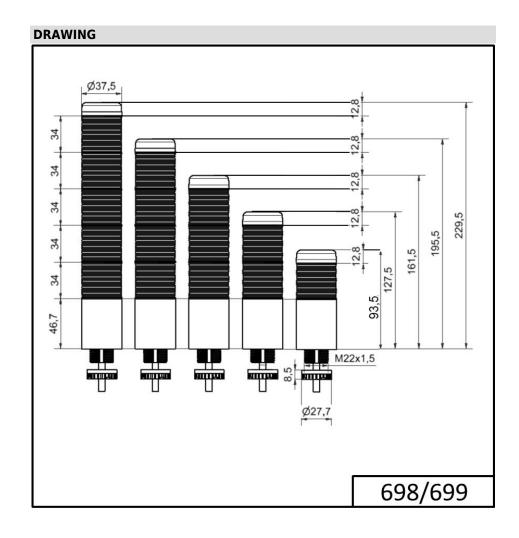

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.