

Maxi free-standing Beacons / Revolving Signal Light 884

## **Rotating Beacon Fresnel 115-230VAC RD**



Part No.: 884.130.60









MECHANICAL DATA		
Height	218 mm	
Diameter	142 mm	
Materials	PC PC/ABS	
Dome colour	Red	
Housing colour	Black	
Protection category	IP65	
Connection	Screw terminals	
cross-sectional area maximum	1,50mm² / 16AWG	
Cable entry	Rubber pinch	
Cable entry minimum	d = 5 mm	
Cable entry maximum	d = 7 mm	
Tension relief	Pull-out protection	
Type of fixing	Base mounting	
Working temperature minimum	-30°C	
Working temperature maximum	+50°C	
Weight with packaging	809 g	
Product weight	721 g	

ELECTRICAL DATA		
Operating voltage	115-230V	
Operating voltage type	AC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	230 VAC	
Rated operational current	95 mA	
Rated inrush current	1.400 mA	
Protection class	Protection class 2	
Pollution degree	3	
Overvoltage category	II	
Isolation voltage	Ui = 250V; Uimp = 2.500V	

OPTICAL DATA	
Light source	LED
Light colour	Red
Optical signal image	Revolving
Service life optical	50,000 h minimum
Rotation speed (rpm)	60 U/min

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Maxi free-standing Beacons / Revolving Signal Light 884

## **Rotating Beacon Fresnel 115-230VAC RD**


APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	Yes
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Maxi free-standing Beacons / Revolving Signal Light 884

## **Rotating Beacon Fresnel 115-230VAC RD**

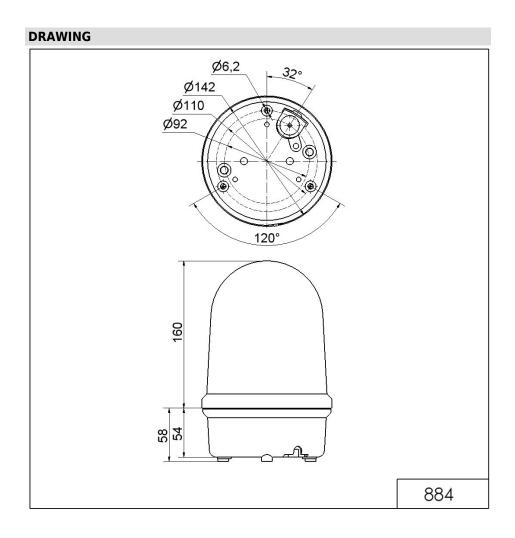

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.